


Step 1

Open hood and remove the 12 plastic push clips securing the plastic radiator shroud to the radiator core. Carefully use a flat head screwdriver to release the clip up, you can now remove the clips. Once all clips have been removed the plastic radiator shroud can be removed. (Fig 1)




Step 2

Using your 10mm socket and ratchet remove the four (4) 10mm bolts securing the upper grille assembly to the radiator support. (Fig 2)

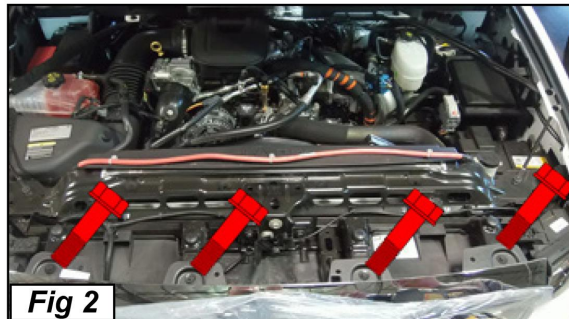

Step 3

Gently lift the top of grille assembly up while pulling back at the same time. Depress the four (4) release tabs located on the inside of the factory grille assembly with your flat head screwdriver. Firmly grasp the grille pulling away from the vehicle to remove it. (Fig 3)

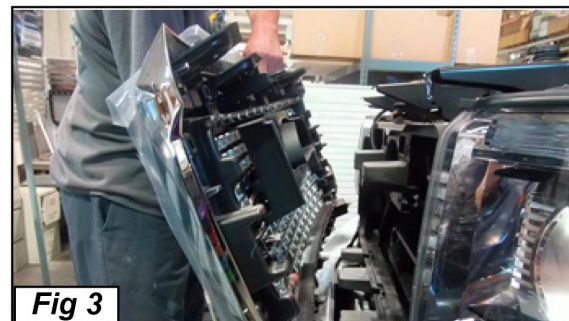

Step 4

Using a cutting wheel carefully cut away the center section of the grille assembly. Afterwards use a file or sandpaper to clean up any sharp or jagged edges. (Fig 4)



Step 5

Flip Grille with insert on its face. Mark the holes with a sharpie or scribe. Remove insert from grille shell. Drille holes using $\frac{1}{4}$ drille bit, this will insure there is adjustment. reinstall the insert use the bolts supplied in the kit. make the insert is flush with the outer lip of grille shell. Then tighten bolts (dont overtighten)